


# TC-

## PCT Thermocouple Probe with Flying lead



# Temperature Solutions from Premier Control Technologies

- Sensor Probe with Flying Lead.
- General Purpose Industrial and OEM Applications.
- Ideal for use with Compression Fittings or Pockets.
- Standard Choice of Thermocouple Types, Sheath Sizes & Lead Types.
- Manufactured to Your Requirements.
- UKAS or Traceable Calibration Available.

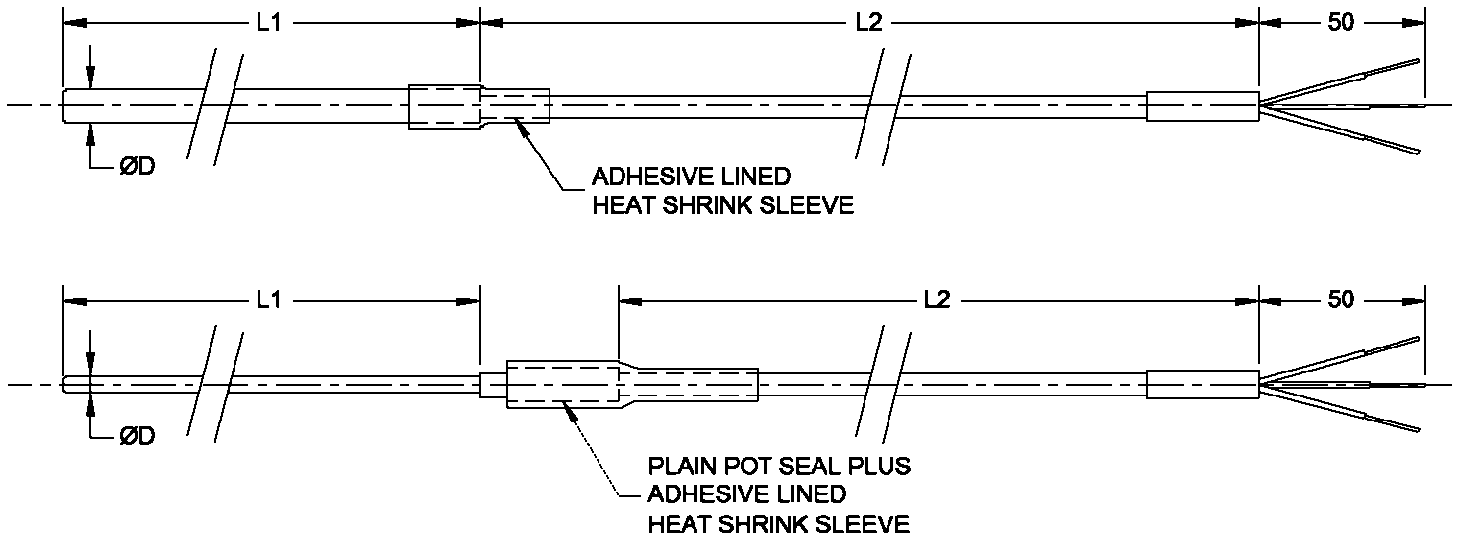

Specifications	
Sensor Type	Type J, K or T thermocouple. Insulated or Grounded hot junction.
Operating Range	Limited to range of lead as standard— see below—can be extended at additional cost
Sheath Material	316 stainless steel
Tolerance Band	BS EN 60584-2:1993 Class 1 or Class 2 (Determined by material availability)
Wiring System	Simplex or Duplex
Lead Types	A—PVC/PVC Screened (-10 to +105°C) B—PTFE/PTFE Screened (-75 to +250°C) C—Glass Fibre Stainless Steel Over braid (0 to 350°C) (Other cables available upon request).

**Premier Control Technologies Ltd**

Suite 1, Trident Business Village, Kilverstone Estate, Thetford, Norfolk, IP24 2RL

Tel: 01842 753456

Fax: 01842 752424

Email: sales@pctflow.com

Web: www.pctflow.com